


CABLE SPECIFICATION

OPTICAL FIBER CABLES

- Colored fibers
- High modulus strength member
- (Non-) Metallic tape armored sheath materials

APPLICATION

- Both indoor and outdoor cabling
- Drop in duct

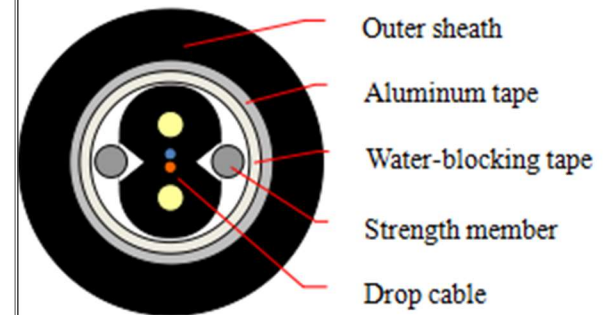

(e . g. GJYXFHA-2)

FEATURES

- Able to be terminated onsite
- All dry structure, facilitating clean installation and ensuring safe and reliable installation
- Low-bend-sensitivity fiber provides excellent communication transmission property

FIBER

Type ITU-T G.657A

CABLE

Spec	Outside diameter (mm)	Max. tensile load (N)		Crush resistant(N/10cm)	
		Short term	Long term	Short term	Long term
GJYX(F)H03-1/2/4	5.8	600	300	1000	300
GJYXD(F)H03-4	6.8				
GJYX(F)H53-1/2/4	7.8	1500	600		

GJYXD(F)H53-4	8.8	
GJYX(F)H63-1/2/4	6.8	
GJYXD(F)H63-4	7.8	
GJYX(F)HA-1/2/4	6.5	
GJYXD(F)HA-1/2/4	7.5	
SHEATH		
Inner	According to customer's request, the materials can adopt PVC, LSZH, ect.	
Outer	According to customer's request, the materials can adopt LSZH, PE ect.	
TEMPERATURE RANGE		
Operating	Transportation & Storage	Installation
-20°C~+60°C	-20°C~+60°C	-10°C~+50°C
Remark:		
All the values in the table are reference value, subject to the actual customer request.		