

CABLE SPECIFICATION

OPTICAL FIBER CABLES


- 900µm loose tubing for fiber
- High modulus aramid yarn strength member
- Good-performance sheath materials

APPLICATION

- Offering reliable protection to fiber

FEATURES

- Compact and light-weight
- Excellent flexibility

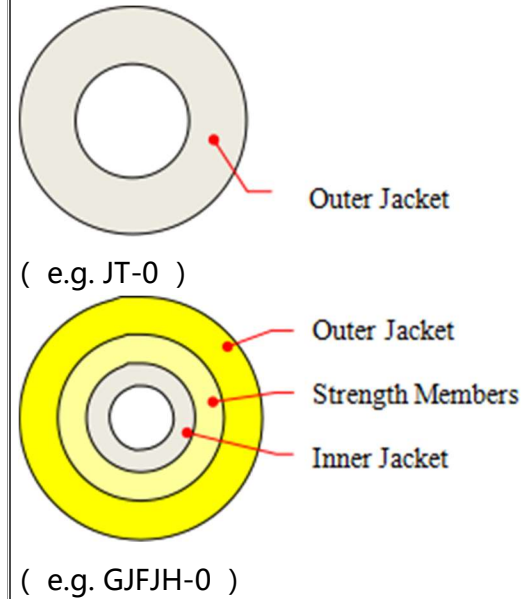

- Good-performance outer sheath offering good protection

CABLE

Spec	Outside diameter (mm)	Inner diameter (mm)	Remark
JT-0	0.88	0.50	
GJFJV(H)-0 , 2.0mm	1.90	0.50	a 3m fiber can thread through it smoothly
GJFJV(H)-0 , 3.0mm	2.85	0.50	

SHEATH

Inner	According to customer's request, the materials can adopt LSZH, Hytrel, ect.
Outside	According to customer's request, the materials can adopt PVC, LSZH, ect.

TEMPERATURE RANGE

Operating	Transportation & Storage	Installation
-20~+60°C	-20°C~+60°C	-10°C~+50°C
<p>Remark: All the values in the table are reference value, subject to the actual customer request.</p>		